


DERBICOLOR® P-FR

Granule surfaced, single reinforced APP modified bitumen waterproofing membrane

ADVANTAGES

- ▶ High quality 4.1 mm (161 mils) granule surfaced UL Class A fire-resistant APP modified bitumen roofing membrane
- ▶ Performance Roof System's exclusive blend of APP (atactic polypropylene) polymers and select asphalts enhances the weathering capabilities and UV resistance of the membrane
- ▶ Reinforced with a tough, dimensionally stable 220 gram polyester mat fortified with continuous fiberglass runners
- ▶ Mineral surfacing provides added resistance to weathering and foot traffic
- ▶ Meets and exceeds requirements of ASTM D6222, Type I, Grade G
- ▶ Can be applied with PERMASTIC Cold Adhesive or heat welded

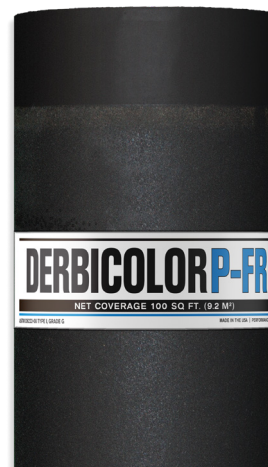

TECHNICAL CHARACTERISTICS

DERBICOLOR® P-FR Results*

PROPERTY	MD	XMD	ASTM
Peak Load @ 0°F; lbf/in	76	71	D5147
Peak Load @ 73.4°F; lbf/in	71	50	D5147
Elongation at Peak Load @ 0°F; %	21	15	D5147
Elongation at Peak Load @ 73.4°F; %	49	67	D5147
Ultimate Elongation @ 73.4°F; %	54	72	D6222
Tear Resistance @ 73.4°F; lbf	122	75	D4073/D5147
Dimensional Stability; %	0.1	0.1	D1204/D5147
Low Temperature Flexibility @ 0°F	Pass	Pass	D5147

PROPERTY	MINIMUM	ASTM
Compound Stability @ 230°F	Pass	D5147
Granule Embedment; g	< 2.0	D4977/D5147

* All values shown are nominal and subject to normal manufacturing tolerances.

PRODUCT INFORMATION*

PROPERTY	VALUE
Thickness; mil (mm)	161 (4.1)
Length; ft (m)	33.5 (10.2)
Width; in (m)	39.4 (1.0)
Weight; lb (kg)	101 (45.8)
Net Coverage; ft² (m²)	100 (9.2)

* All values shown are nominal and subject to normal manufacturing tolerances.

AVAILABLE COLORS



**CUSTOM
COLOR OPTIONS
AVAILABLE**

PACKAGING & STORAGE

Packaged 20 rolls per pallet. Rolls should be stored on end, on raised platforms protected from the weather.



www.performancerooftsystems.us
4800 Dr. Martin Luther King Jr. Blvd., Kansas City, MO 64130
TOLL FREE: 800.727.9872 TEL: 816.921.0221



REV. 03.23